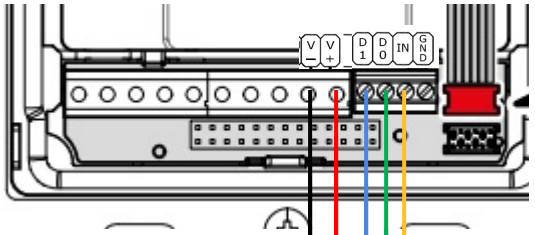

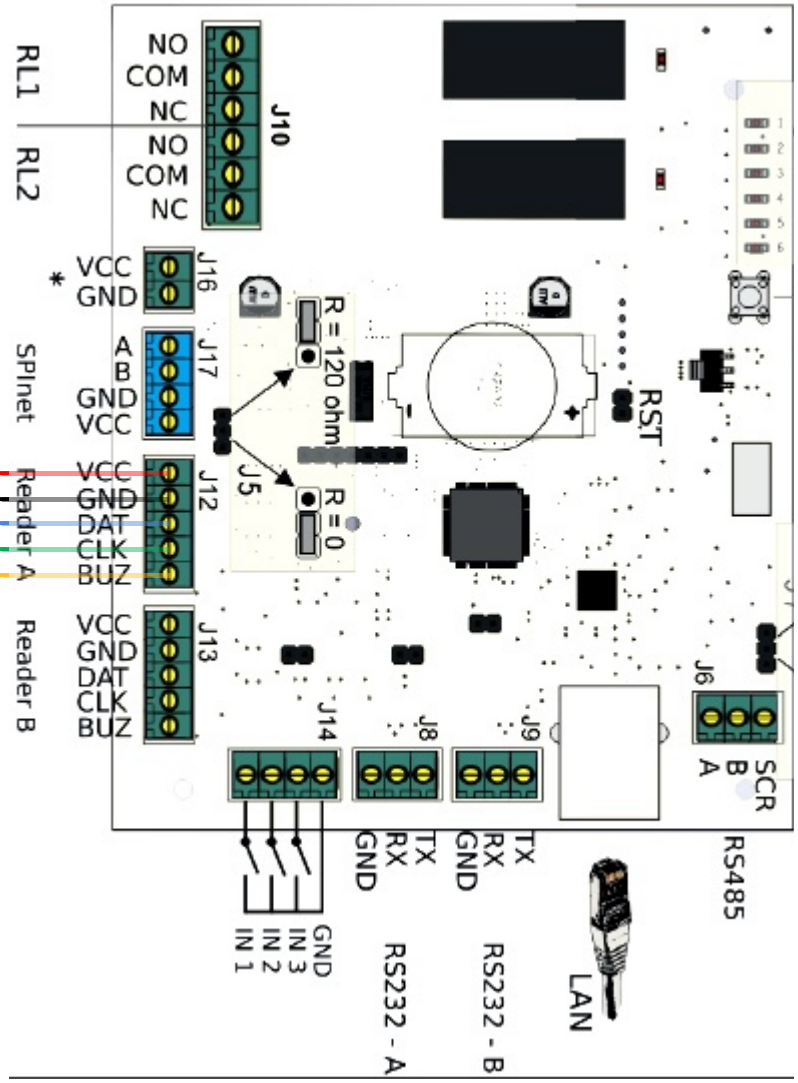

FAAC | KEYDOM ACCESS CONTROL

Comelit Ultra Configuration

Configuration - Devices

Select device & readers

Validation Mode (offline):	Only in archive pass
Reader type:	NAL
Bus Type:	Wiegand
Append number of bits for Wiegand	
Frequency:	MIFARE
MIFARE identifier mode:	FAAC no-autoread
Ignore mode:	Last media (on the same re
*Ignore Time (sec):	1
*Comparison Mask:	###%%%%#%%%% %%%%%%%%%%%% %%%%%%%%%%

Keypad Settings - Set in VIP Manager

General

Number of characters	4
Backlight	Always on
Maximum number of errors	Modalità disattivata
Enable Panic function	☐
Enable Wiegand mode	☑
Maximum Wiegand response time (ms)	500